

40V N-Channel Power MOSFET
• General Description

It combines trench MOSFET technology with a low resistance package to provide extremely low $R_{DS(ON)}$.

• Features

- Low $R_{DS(ON)}$ to minimize conductive loss
- Low Gate Charge for fast switching
- Low Thermal resistance

• Application


- BLDC Motor driver
- DC-DC
- Battery protection

• Ordering Information:

Part NO.	ZM020N04HB
Marking	ZM020N04H
Packing Information	REEL TAPE
Basic ordering unit (pcs)	800

• Absolute Maximum Ratings ($T_C=25^{\circ}\text{C}$)


Parameter	Symbol	Conditions	Value	Unit
Drain-Source Voltage	V_{DS}		40	V
Gate-Source Voltage	V_{GS}		± 20	V
Continuous Drain Current	I_D	$T_C=25^{\circ}\text{C}$	155	A
	I_D	$T_C=75^{\circ}\text{C}$	122	A
	I_D	$T_C=100^{\circ}\text{C}$	100	A
Pulsed Drain Current	I_{DM}	Pulsed; $t_p \leq 10 \mu\text{s}$; $T_{mb} = 25^{\circ}\text{C}$;	465	A
Total Power Dissipation	P_D	$T_C=25^{\circ}\text{C}$	156	W
Total Power Dissipation	P_D	$T_A=25^{\circ}\text{C}$	4.2	W
Operating Junction Temperature	T_J		-55 to +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}		-55 to +150	$^{\circ}\text{C}$
Single Pulse Avalanche Energy	E_{AS}	$L=0.1\text{mH}$, $V_{GS}=10\text{V}$, $R_g=25\Omega$,	320	mJ
		$L=0.5\text{mH}$, $V_{GS}=10\text{V}$, $R_g=25\Omega$,	460	mJ
ESD Level (HBM)	CLASS 2			

• Product Summary


$$V_{DS} = 40\text{V}$$

$$R_{DS(ON)} = 2.2\text{m}\Omega$$

$$I_D = 155\text{A}$$



TO-263



•Thermal resistance

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal resistance, junction - case	R_{thJC}		-	0.8	°C/W
Thermal resistance, junction-ambient ^①	R_{thJA}		-	30	°C/W
Soldering temperature	T_{sold}		-	260	°C

•Electronic Characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	40			V
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	2.0	2.7	4.0	V
Drain-Source Leakage Current	I_{DSS}	$V_{GS}=0V, V_{DS}=40V$			1.0	μA
Gate- Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$			100	nA
Static Drain-source On Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=40A$		2.2	3	m Ω
Forward Transconductance	g_{FS}	$V_{DS}=5V, I_{SD}=20A$		30		s
Diode Forward Voltage	V_{FSD}	$V_{GS}=0V, I_{SD}=40A$			1.3	V

•Dynamic characteristics

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input capacitance	C_{iss}	$f=1MHz, V_{DS}=25V$	-	8270	10751	pF
Output capacitance	C_{oss}		-	695	903.5	
Reverse transfer capacitance	C_{rss}		-	403	524	
Gate Resistance	R_g	$f=1MHz$	-	1.2	2.2	Ω
Total gate charge	Q_g	$V_{DD}=15V,$ $I_D=20A,$ $V_{GS}=10V$	-	108	151	nC
Gate - Source charge	Q_{gs}		-	33	46	
Gate - Drain charge	Q_{gd}		-	19	27	
Turn-ON Delay time	$t_{D(on)}$	$V_{GS}=10V, V_{DS}=15V,$ $R_G=3.3\Omega, I_D=20A$	-	19	29	ns
Turn-ON Rise time	t_r		-	70	105	ns
Turn-Off Delay time	$t_{D(off)}$		-	78	117	ns
Turn-Off Fall time	t_f		-	53	80	ns
Reverse Recovery Time	t_{RR}	$V_{DD}=20V, dI_S/dt =$ $100A/\mu s, I_S=50A$	-	65	85	ns
Reverse Recovery Charge	Q_{RR}		-	95	124	nC

Fig.1 Gate-Charge Characteristics

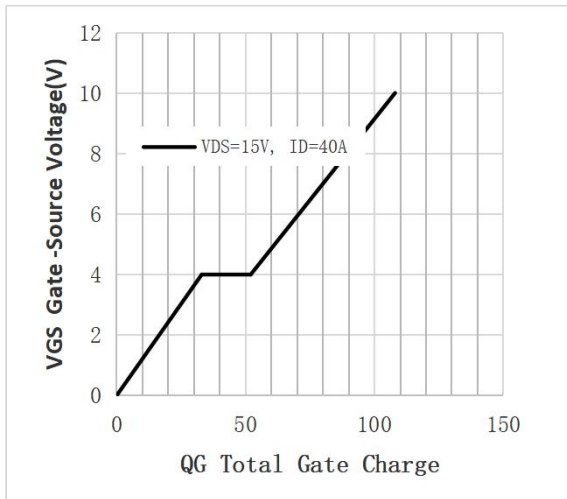


Fig.2 Capacitance Characteristics

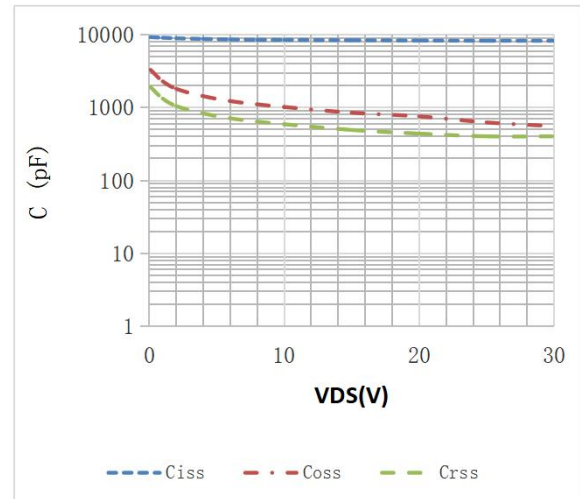


Fig.3 Power Dissipation

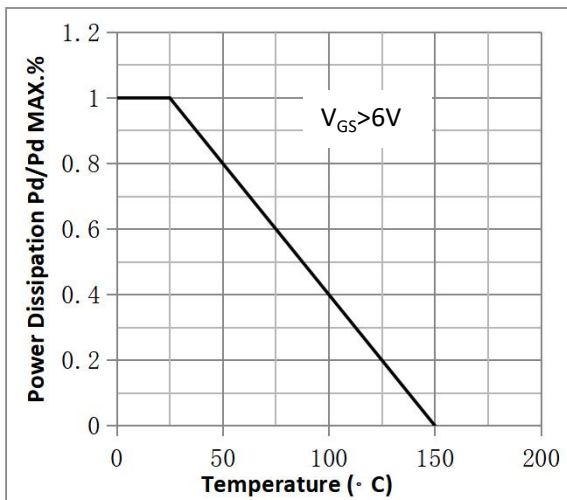


Fig.4 Typical output Characteristics

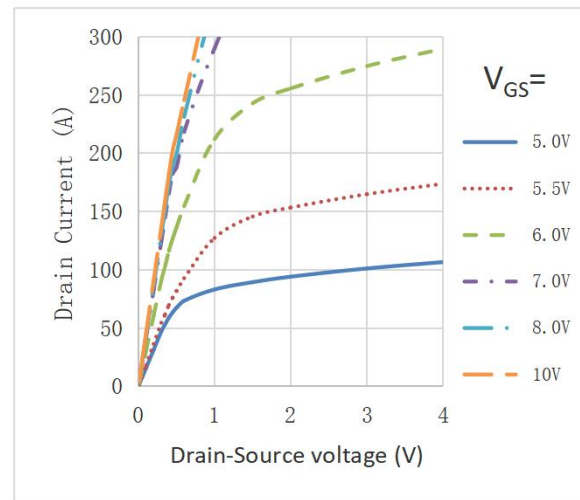


Fig.5 Threshold Voltage V.S Junction Temperature

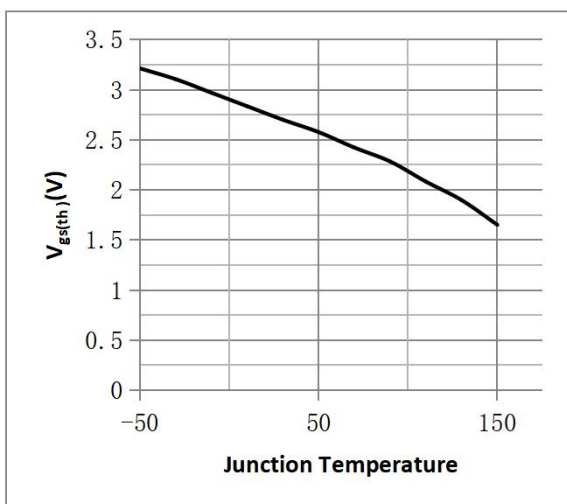


Fig.6 Resistance V.S Drain Current

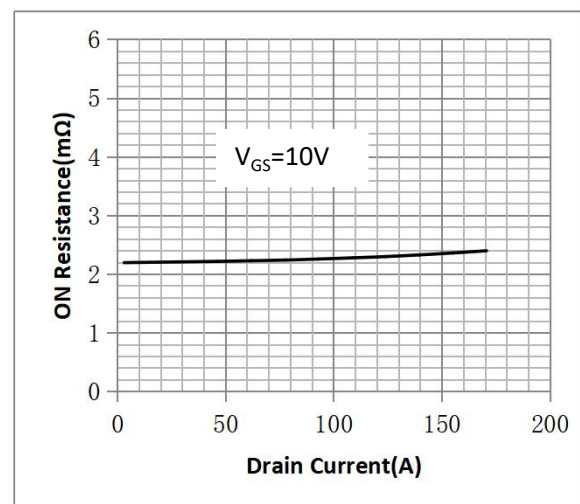


Fig.7 On-Resistance VS Gate Source Voltage

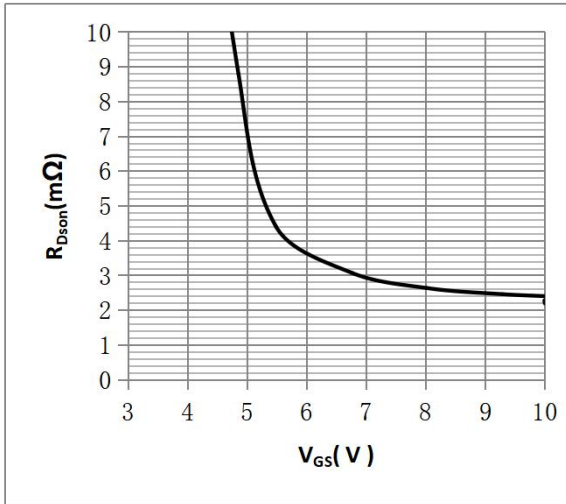


Fig.8 On-Resistance V.S Junction Temperature

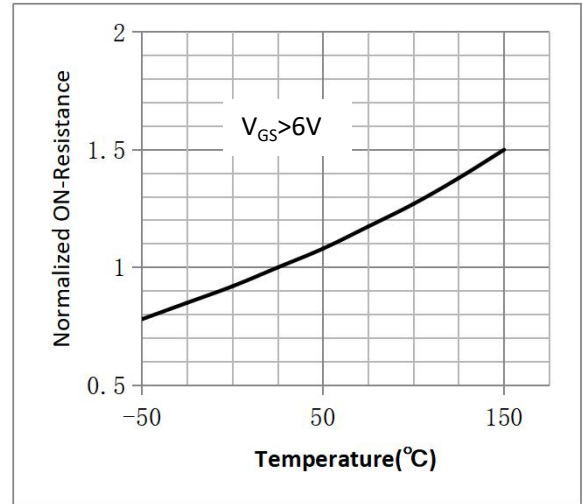


Figure 9. Diode Forward Voltage vs. Current

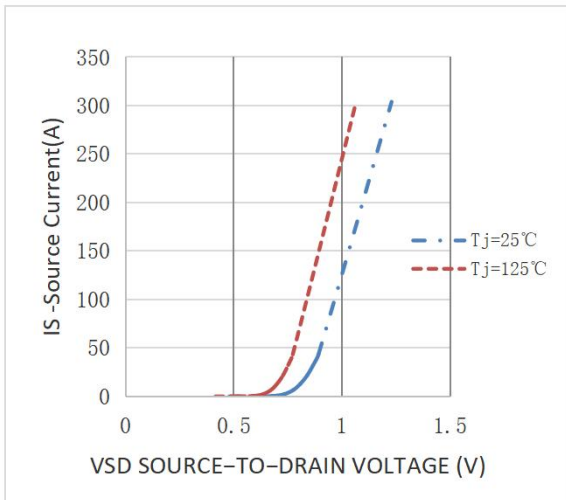


Figure 10. Transfer Characteristics

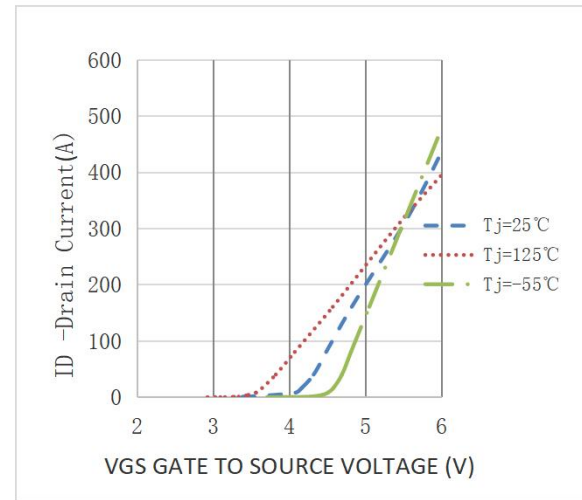


Fig.11 Safe Operating Area





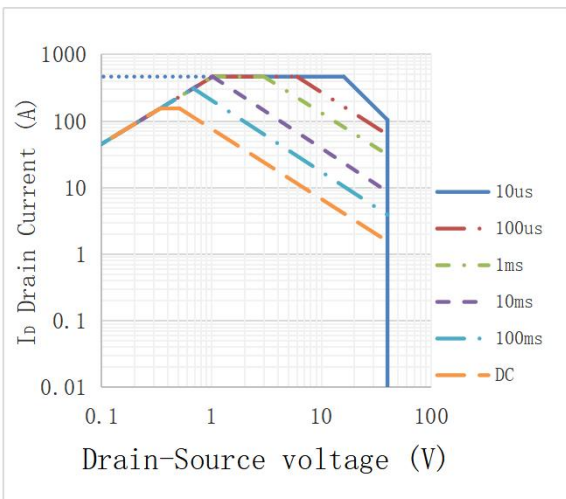


Fig.12 ID vs. Case Temperature^②

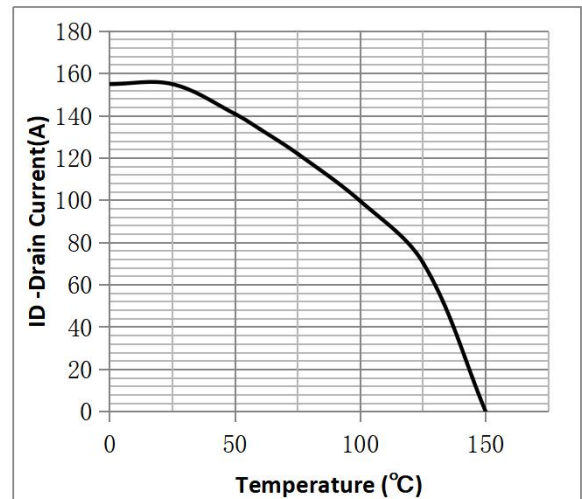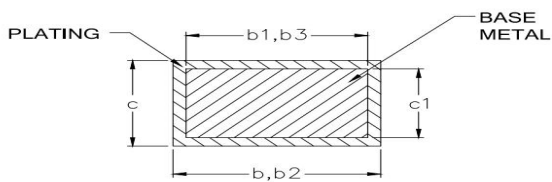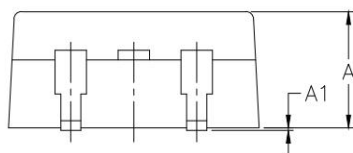

•TO-263 Package Outline

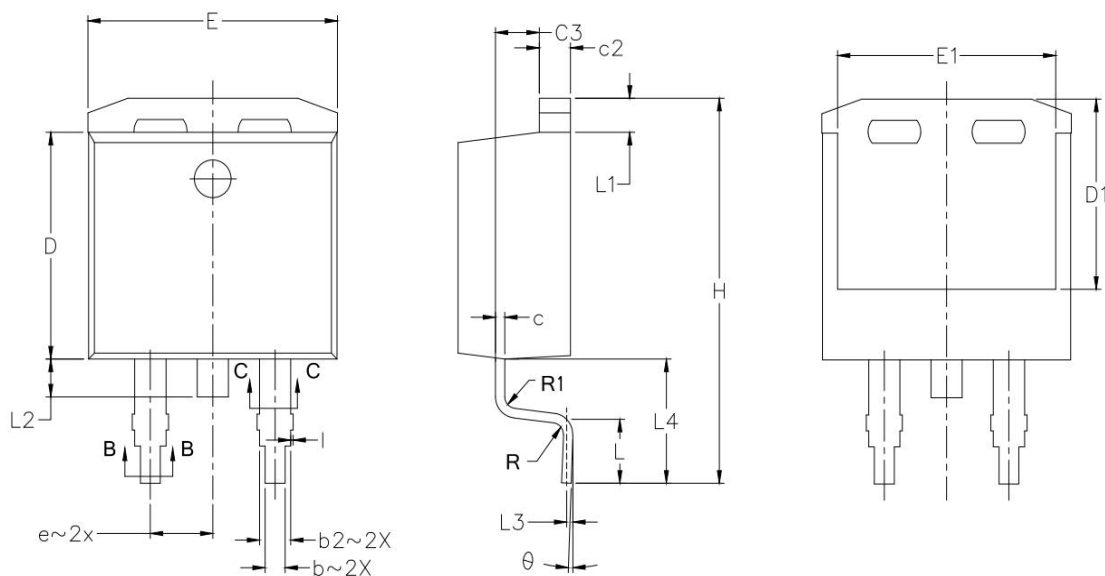

NOTES:

- 1.Dimension D & E Does Not Include Mold Flash
- 2.Dimension b2 Does Not Include Protrusions

SYMBOLS	COMMON			
	MM		INCH	
	MIN.	MAX.	MIN.	MAX.
A	4.064	4.826	0.160	0.190
A1	0.000	0.254	0.000	0.010
b	0.508	0.991	0.020	0.039
b1	0.508	0.889	0.020	0.035
b2	1.143	1.778	0.045	0.070
b3	1.143	1.727	0.045	0.068
c	0.381	0.737	0.015	0.029
c1	0.381	0.584	0.015	0.023
c2	1.143	1.651	0.045	0.065
D	8.382	9.652	0.330	0.380
D1	6.858	—	0.270	—
E	9.652	10.668	0.380	0.420
E1	6.223	—	0.245	—
e	2.540 BSC.		0.100 BSC.	
H	14.605	15.875	0.575	0.625
L	1.778	2.794	0.070	0.110
L1	—	1.676	—	0.066
L2	—	1.778	—	0.070
L3	0.254 BSC		0.010 BSC	
L4	4.780	5.280	0.188	0.208
R	0.460 TYP		0.018 TYP	
R1	0.460 TYP		0.018 TYP	
θ	0°	8°	0°	8°
C3	1.68	1.88	0.0661	0.0740
I	—	0.100	—	0.0039



Note:

- ① Device mounted on FR-4 substrate PC board, 2oz copper, with thermal bias to bottom layer 1inch square copper plate;
- ② Practically the current will be limited by PCB, thermal design and operating temperature. $V_{GS}=10V$.

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from ZMJ SEMICONDDUCTORS CO.,LTD.
- ZMJ SEMICONDDUCTORS CO.,LTD. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- ZMJ SEMICONDDUCTORS CO.,LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- ZMJ SEMICONDDUCTORS CO.,LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. ZMJ SEMICONDDUCTORS CO.,LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify ZMJ SEMICONDDUCTORS CO.,LTD. for any damages resulting from such improper use or sale.
- Since ZMJ uses lot number as the tracking base, please provide the lot number for tracking when complaining.

Revision History

Version	Date	Change
A	2022.6.6	
B	2023.6.5	1.Add Reach, HF figure, 2.ID modify